

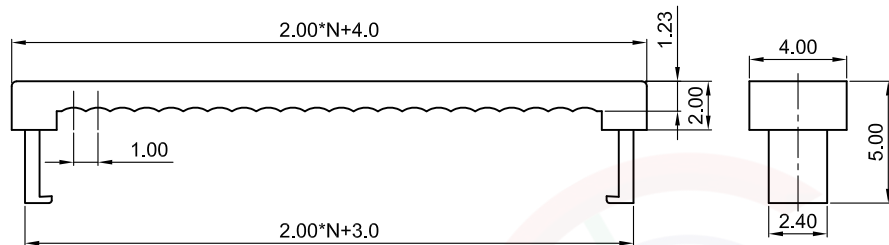


Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

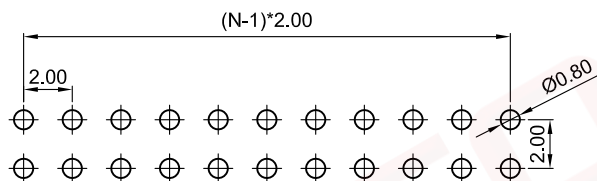

N=No. of contacts/2

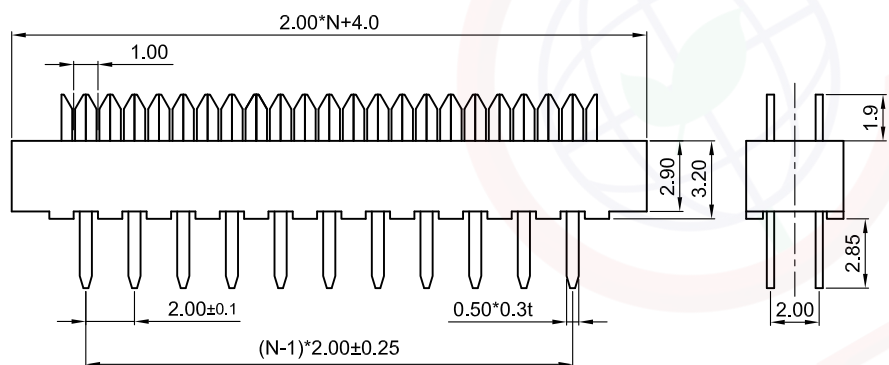

Recommend PCB layout(Tolerance:±0.05)

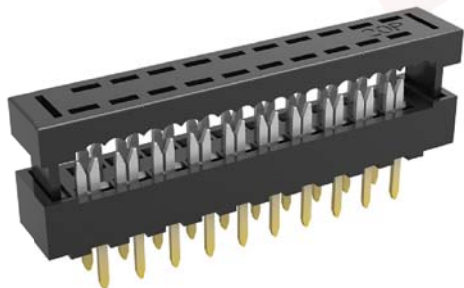

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/08/08'		LJC 09/08/08'
B	DRAWING UPDATE	JLZ 07/09/19'		
C	DRAWING UPDATE	JLZ 07/07/25'		

NOTES:

1. Materials

1.1 Insulator:Thermoplastic(UL 94V-0).

1.2 Contact: Copper alloy.

2. Specification

2.1 Insulation resistance:1000MQ min.

2.2 Dielectric withstanding voltage:AC 500V per minute.

3. Product number code:

DS1018-02-

X X X
Contact plating
8: Full gold flash
2: Nickel+Gold flash
Housing color
B: Black
No. of contacts
04~80

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	DIP PLUG CONNECTOR PITCH 2.00mm
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1018-02 SERIES
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD		
DRAWING TYPE		CUSTOMER				
SCALE		1:1	SHEET 1 OF 1			
DRAWING NO.		C-DS1018-02-XXX-C				