



The information provided herein is from CONVELY, Electronic Co., Ltd., and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONVELY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONVELY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONVELY may enforce its intellectual property rights at its own discretion; failures or delays to enforce shall constitute a waiver of such rights.

NOTES:

1. Materials
 - 1.1 Insulator:Thermoplastic(UL 94V-0).
 - 1.2 Contact: Copper alloy.
2. Specification
 - 2.1 Temperature:-25~+85°C.
 - 2.2 Contact resistance:30mΩ max.
 - 2.3 Insulation resistance:100MΩ min.
 - 2.4 Dielectric withstanding voltage:AC 100V per minute.
3. Product number code:

DS1020-18 - X X X X X


 - Packing type
R: Tape on reel
 - Pick up support
S: W/ Cap
 - Contact plating
6: Full tin
8: Gold flash
 - Cover color
B: Black
 - Housing color
V:Ivory
 - No. of contacts
04~40

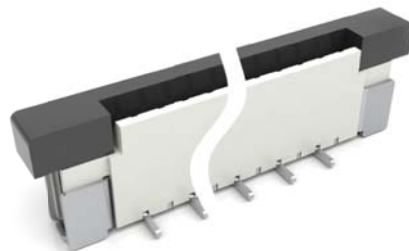

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.0mm FPC
X. ±0.60	X. ±5°			UNITS	mm	ZIF Upright SMT Type H=5.5mm	
.X ±0.38	.X ±3°			SHEET SIZE	A4	SERIES	DS1020-18 SERIES
.XX ±0.25	.XX ±2°			 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE	CUSTOMER						
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1020-18-XXXXXX-D						