

The information provided herein is from CONNELLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNELLY are reserved. CONNELLY does not warrant the accuracy of the information provided herein. CONNELLY does not constitute authorization of any modification or use of the information provided herein for any purpose other than for reference purposes only and does not constitute authorization of its use in any form or manner. CONNELLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

NOTES:

1. Material
 - 1.1 Insulator: Thermoplastic (UL 94V-0).
 - 1.2 Contact: Copper alloy.
2. Specification
 - 2.1 Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$.
 - 2.2 Contact resistance: $30\text{m}\Omega$ max.
 - 2.3 Insulation resistance: $100\text{M}\Omega$ min.
 - 2.4 Dielectric withstanding voltage: AC 100V per minute.
3. Product number code:
DS1020-22- X X X X X X






Diagram illustrating the product number code structure and dimensions:

- Packing type
R: Tape on reel
- Pick up support
S: W/ Cap
- Contact plating
T1: Tin
8: Gold flash
- Cover color
B: Black
- Housing color
V: Ivory
- No. of contacts
04~40

Dimension: 0.30

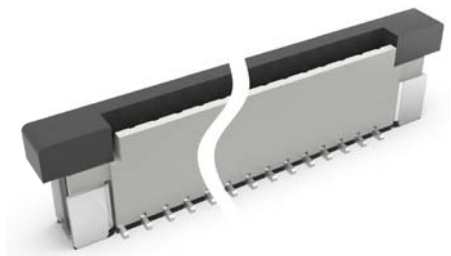

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.0mm FPC ZIF UPRIGHT SMT TYPE	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1020-22 SERIES	
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1020-22-XXXXXX-B							