



Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

V/T Type

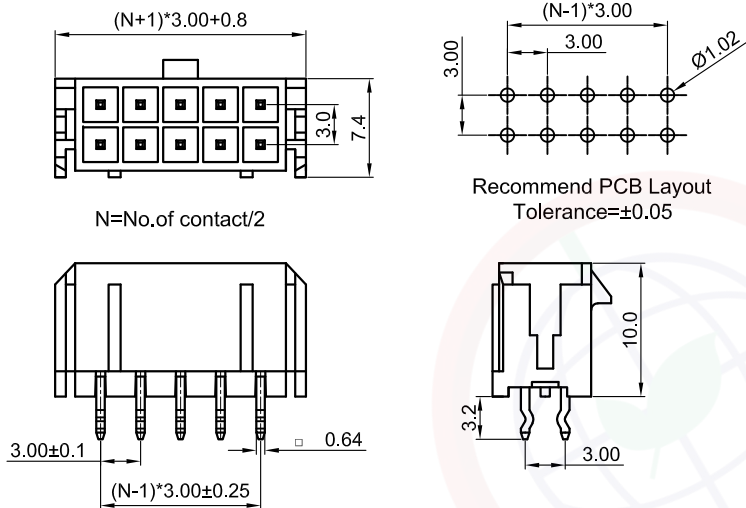

R/A Type

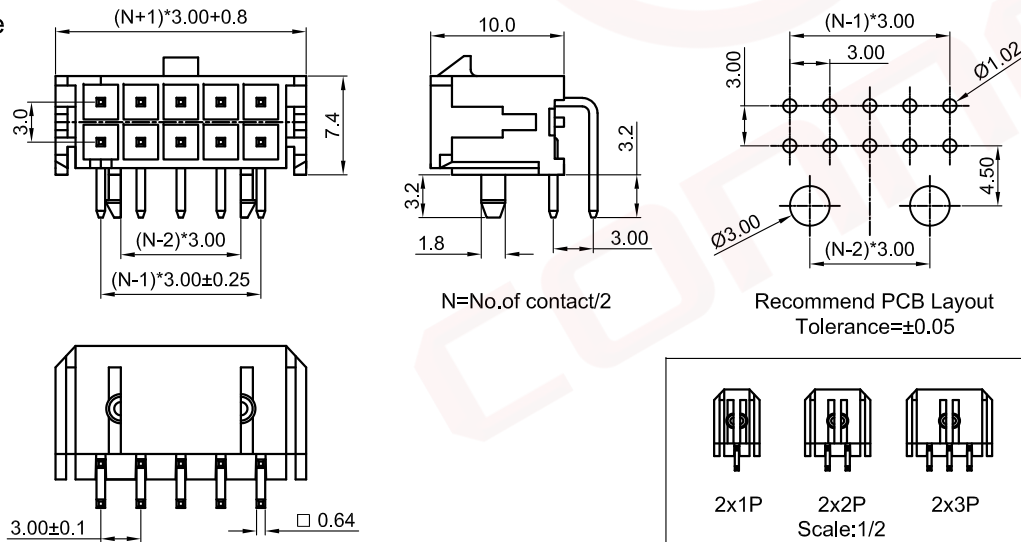

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/11/16'	HZW 03/11/16'	LJC 03/11/16'
B	DRAWING UPDATE	JLZ 04/01/20'		
C	DRAWING UPDATE	JLZ 07/04/25'		

Notes:

Specifications:

1. Contact Resistance: 30mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
4. Current Rating: 5A.
5. Temperature: -40°C~+105°C.

Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Tin Plating Over Nickel.
3. Insulator Material: Nylon.


Product Number Code:

DS1073-04 - X X X X X

Legend:

- Contact Plating 6: Tin
- Housing Color B: Black
- Mounting type V: V/T type R: R/A type
- Connector type M: Male
- No.of contact 2x1~2x12

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	3.0mm MICRO ATX CONNECTOR	
X.	±0.60	X.	±5°	UNITS	mm	V/T & V/R Type		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1073-04 SERIES	
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 4					
DRAWING NO.	C-DS1073-04-XXXXX-B							

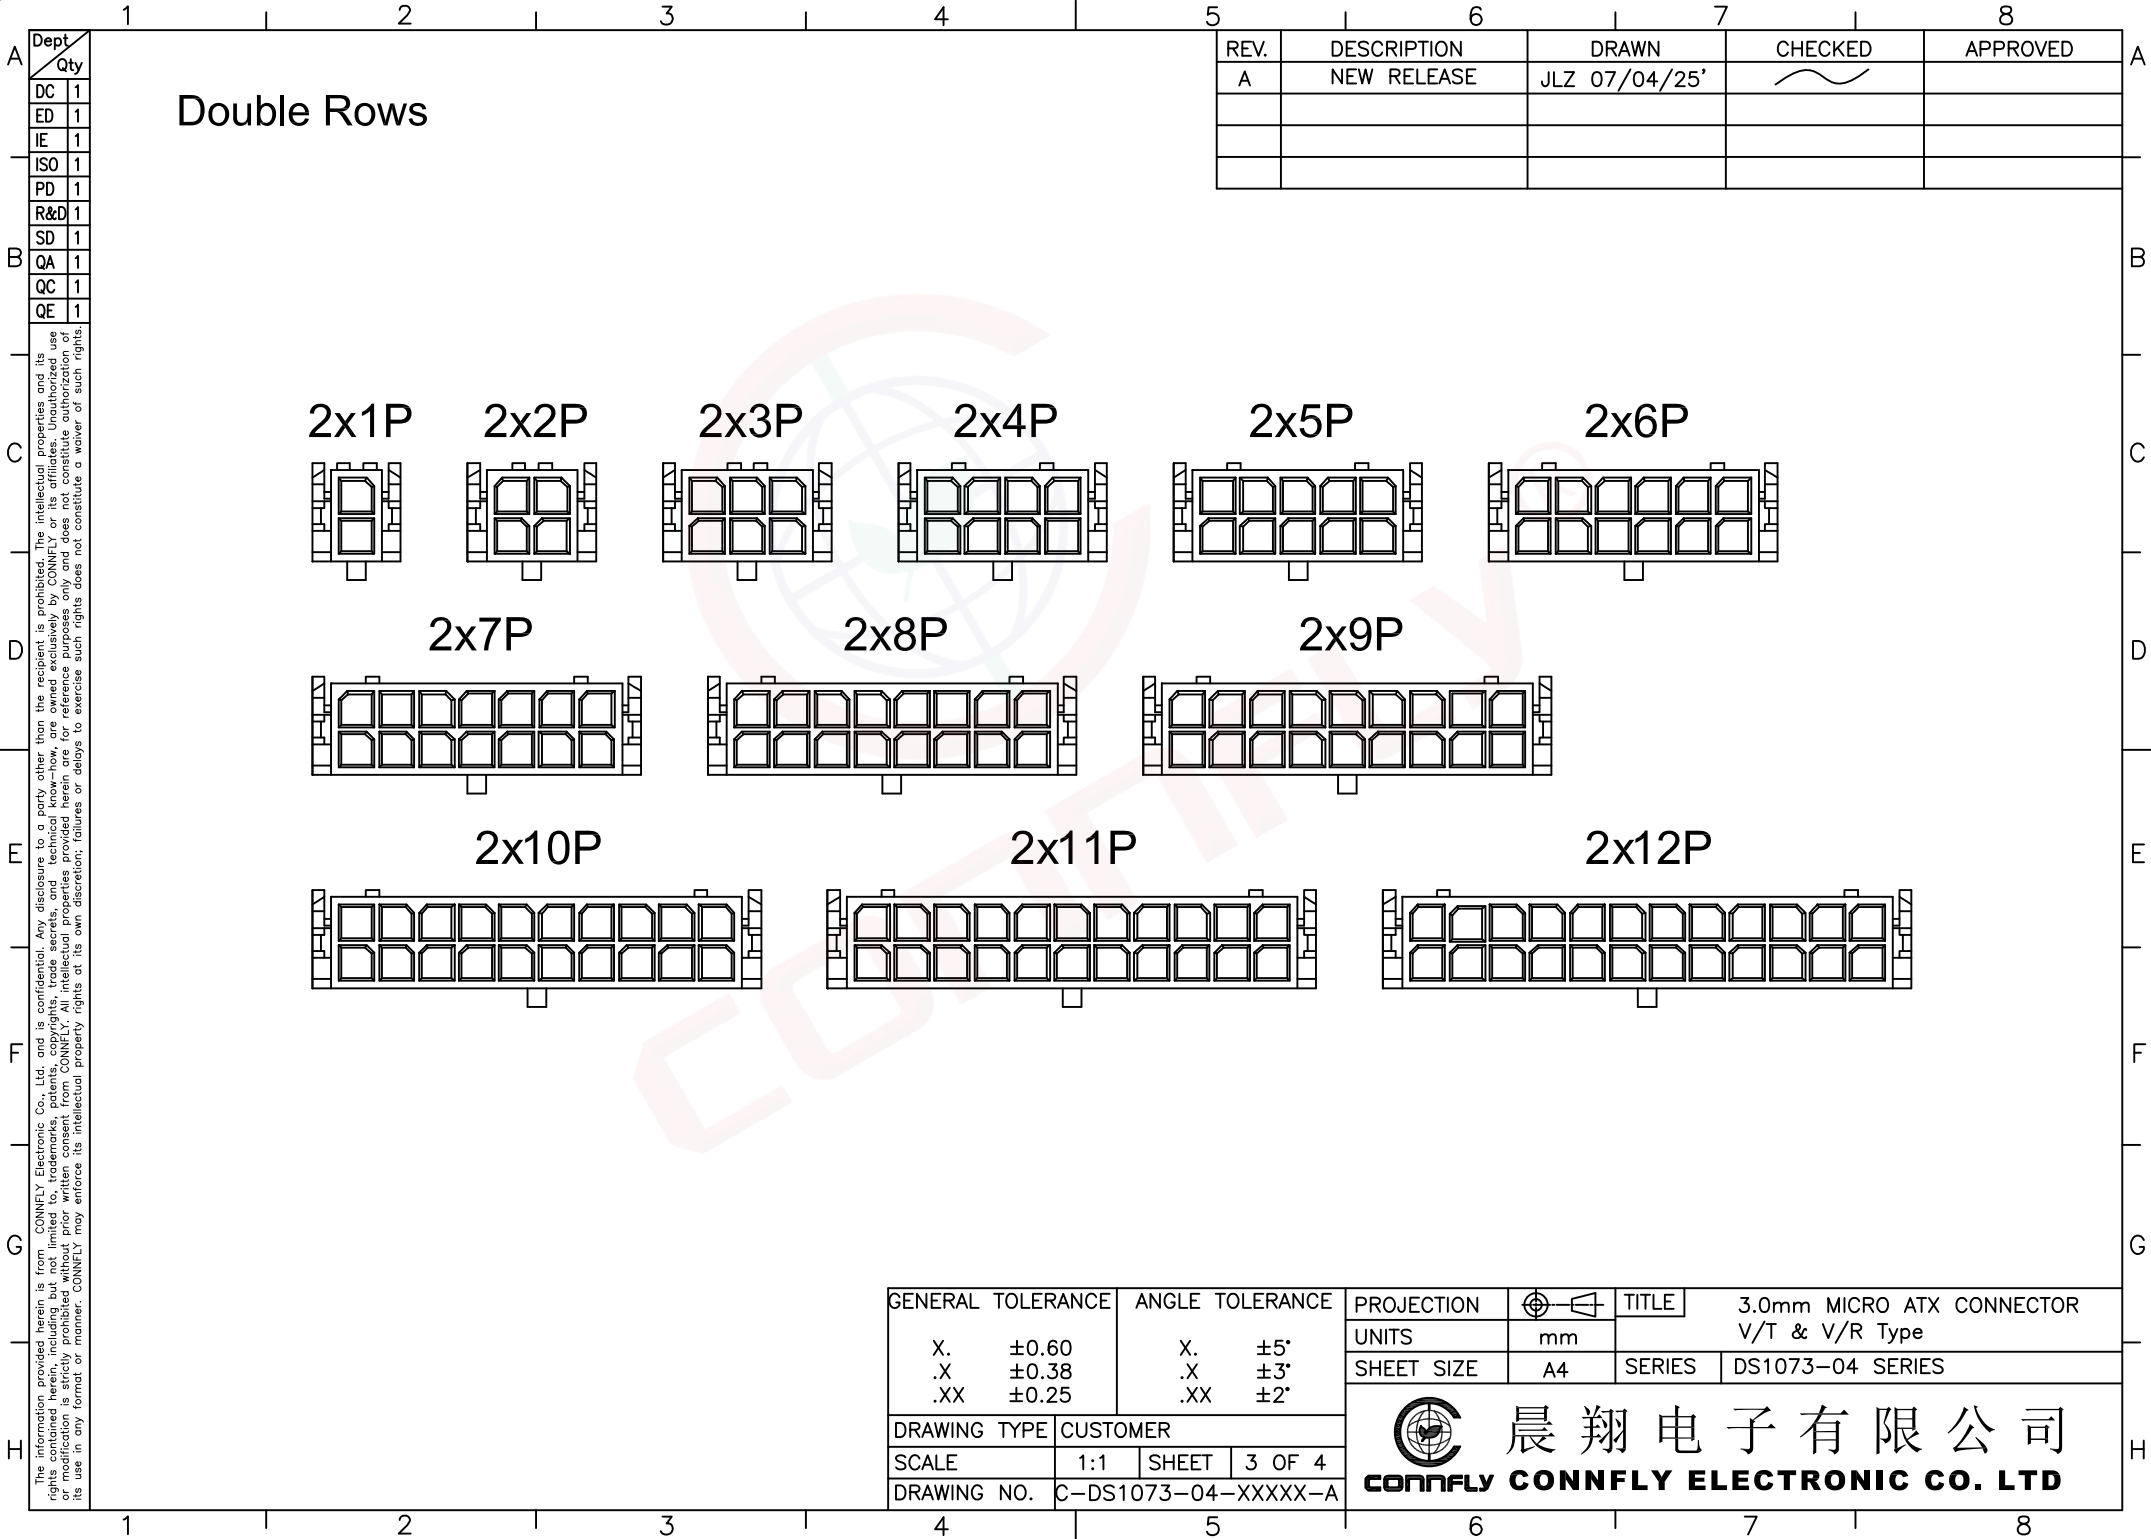

1

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

