



Male

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | WPY 06/16/25' | | |
| | | | | |
| | | | | |

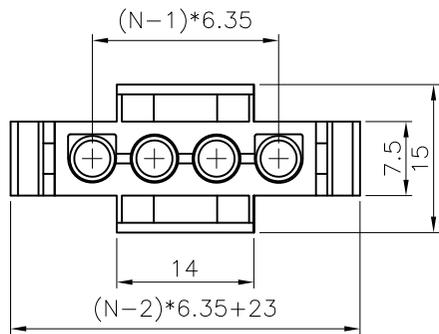

N=No.of contacts

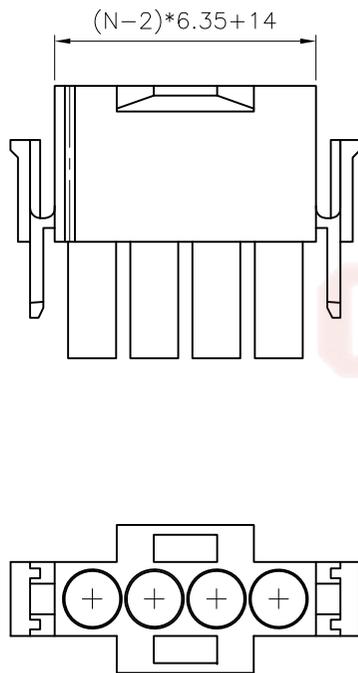

NOTES:

Materials:

1.Housing: PA66

Product Number Code:


I-DS1148-10 - X X X 0

- Housing Color
- T: Transparent
- Connector type
- M: Male
- No. of positions
- 1X2~1X6

| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE |
|-------------------|-------|--------------------|--------|-------------------------------------------------------|----|---------------------------|
| X. | ±0.60 | X. | ±5° | UNITS | mm | 63080 6.35mm wire to wire |
| .X | ±0.38 | .X | ±3° | SHEET SIZE | A4 | SERIES DS1148-10 SERIES |
| .XX | ±0.25 | .XX | ±2° | 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD | | |
| DRAWING TYPE | | CUSTOMER | | | | |
| SCALE | 1:1 | SHEET | 1 OF 6 | | | |
| DRAWING NO. | | C-DS1148-10-XXX0-A | | | | |

Male

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | WPY 06/16/25' | | |
| | | | | |
| | | | | |

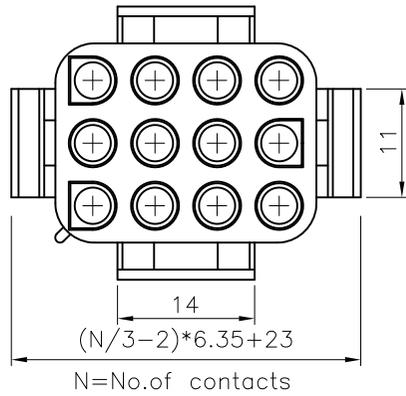





NOTES:

Materials:

1.Housing: PA66

Product Number Code:


I-DS1148-10 - X X X 0

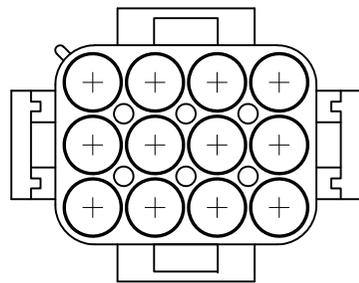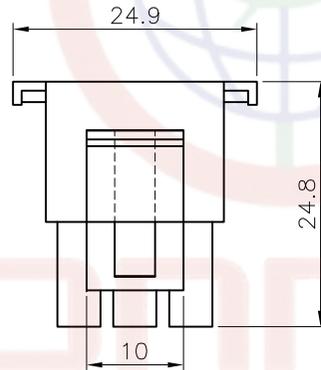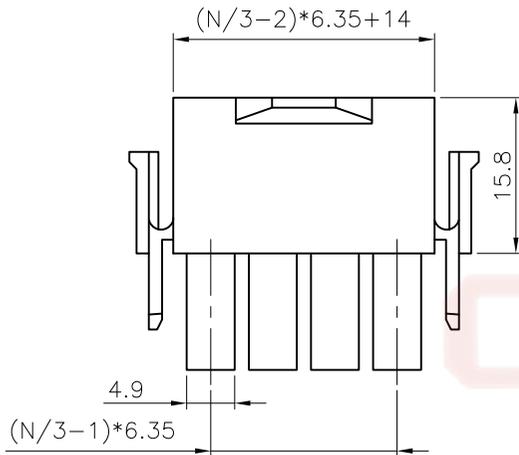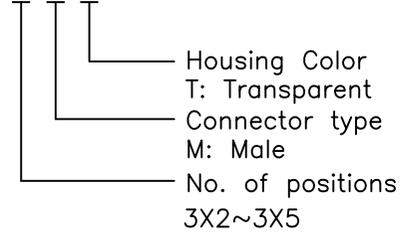

| | | | | | | | | |
|-------------------|-------|--------------------|--------|--------------------------------------------------------------|----|------------|---------------------------|--|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | 63080 6.35mm wire to wire | |
| X. | ±0.60 | X. | ±5° | UNITS | mm | SHEET SIZE | A4 | |
| .X | ±0.38 | .X | ±3° | SHEET SIZE | A4 | SERIES | DS1148-10 SERIES | |
| .XX | ±0.25 | .XX | ±2° | 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD | | | | |
| DRAWING TYPE | | CUSTOMER | | | | | | |
| SCALE | 1:1 | SHEET | 2 OF 6 | | | | | |
| DRAWING NO. | | C-DS1148-10-XXX0-A | | | | | | |

Male

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | WPY 06/16/25' | | |
| | | | | |
| | | | | |

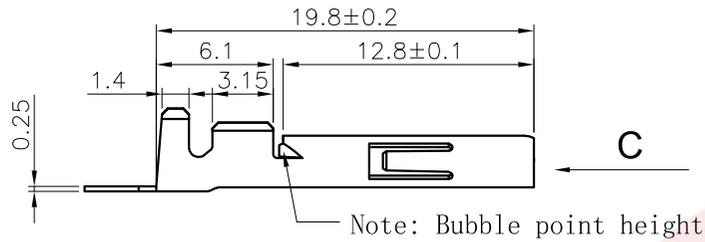

NOTES:

Materials:

1.Contact: Phosphor bronze,T=0.25

Specifications:

1.Temperature: -25°C~+85°C.






2.The terminal surface is smooth, without deformation, oxidation, poor electroplating, etc

3.Maximum burr size 0.03mm MAX;

Product Number Code:

T-DS1148-10 - X X X 0


- X Contact plating
- 6: Full Tin
- Mounting type
- C: Crimp
- Contact type
- M: Male

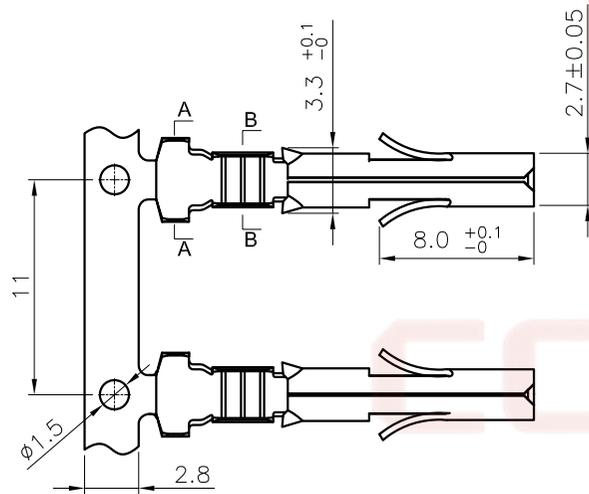

| | | | | | | | | |
|-------------------|-------|--------------------|--------|--------------------------------------------------------------|----|------------|---------------------------|--|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | 63080 6.35mm wire to wire | |
| X. | ±0.60 | X. | ±5° | UNITS | mm | SHEET SIZE | A4 | |
| .X | ±0.38 | .X | ±3° | SHEET SIZE | A4 | SERIES | DS1137-30 SERIES | |
| .XX | ±0.25 | .XX | ±2° | 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD | | | | |
| DRAWING TYPE | | CUSTOMER | | | | | | |
| SCALE | 2:1 | SHEET | 3 OF 6 | | | | | |
| DRAWING NO. | | C-DS1148-10-XXX0-A | | | | | | |

Female

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | WPY 06/16/25' | | |
| | | | | |
| | | | | |

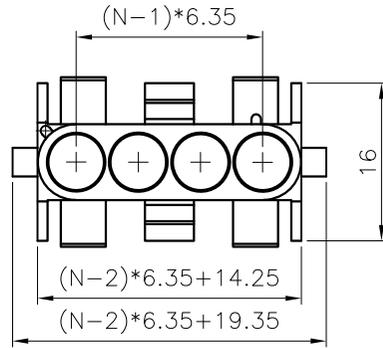

N=No.of contacts





NOTES:

Materials:

1.Housing: PA66

Product Number Code:

I-DS1148-10 - X X X 0

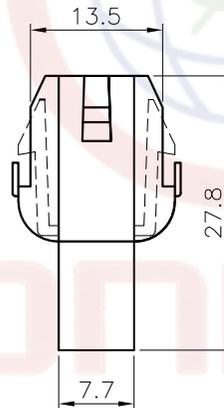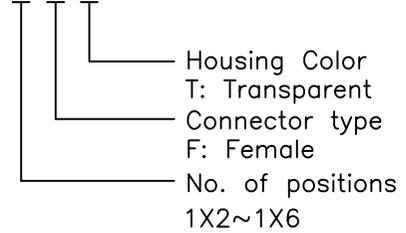

| | | | | | | | | | |
|-------------------|-------|--------------------|--------------|------------|-------------------------------------------------------|------------|---------------------------|--|--|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | 63080 6.35mm wire to wire | | |
| X. | ±0.60 | X. | ±5° | UNITS | mm | SHEET SIZE | A4 | | |
| .X | ±0.38 | .X | ±3° | | | SERIES | DS1148-10 SERIES | | |
| .XX | ±0.25 | .XX | ±2° | | | | | | |
| DRAWING TYPE | | CUSTOMER | | | 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD | | | | |
| SCALE | | 1:1 | SHEET 4 OF 6 | | | | | | |
| DRAWING NO. | | C-DS1148-10-XXX0-A | | | | | | | |

Female

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | WPY 06/16/25' | | |
| | | | | |
| | | | | |

NOTES:

Materials:

1.Contact: Phosphor bronze,T=0.25

Specifications:

1.Temperature: -25°C~+85°C.







2.The terminal surface is smooth, without deformation, oxidation, poor electroplating, etc

3.Maximum burr size 0.03mm MAX;

Product Number Code:

T-DS1148-10 - X X X 0

- X Contact plating
- 6: Full Tin
- Mounting type
- C: Crimp
- Contact type
- F: Female

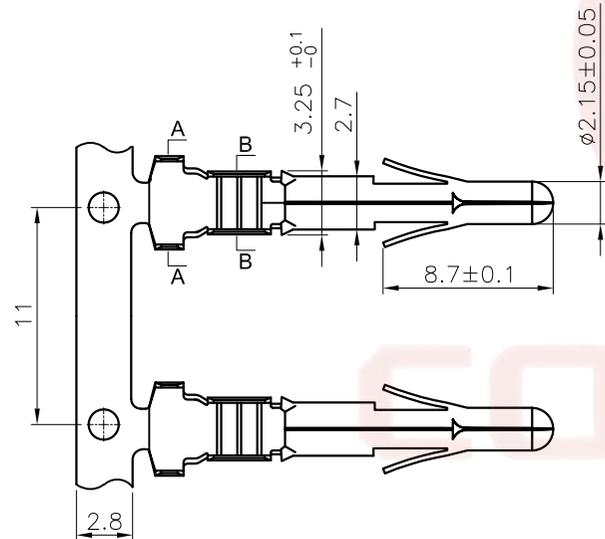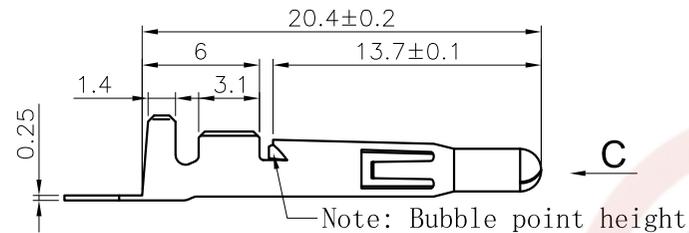

| | | | | | | | | |
|-------------------|-------|--------------------|--------|--------------------------------------------------------------|----|------------|---------------------------|--|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | 63080 6.35mm wire to wire | |
| X. | ±0.60 | X. | ±5° | UNITS | mm | SHEET SIZE | A4 | |
| .X | ±0.38 | .X | ±3° | | | SERIES | DS1148-10 SERIES | |
| .XX | ±0.25 | .XX | ±2° | 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD | | | | |
| DRAWING TYPE | | CUSTOMER | | | | | | |
| SCALE | 2:1 | SHEET | 6 OF 6 | | | | | |
| DRAWING NO. | | C-DS1148-10-XXX0-A | | | | | | |