


Dept  
Qty  
DC 1  
ED 1  
IE 1  
ISO 1  
PD 1  
R&D 1  
SD 1  
QA 1  
QC 1  
QE 1

CONNFLY Electronic Co., Ltd. and its confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNFLY Electronic Co., Ltd. are reserved. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.



Applicable terminal types

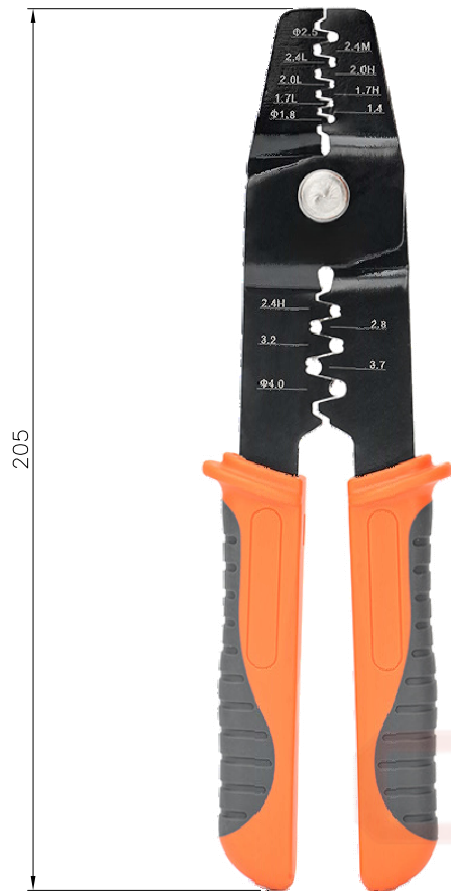

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 03/17/25'		

Notes:

- 1.Scope of operation functions:Plug-in spring terminal
- 2.Crimping Range:30~14AWG
- 3.Conductor crimping:0.05~2.0mm<sup>2</sup>
- 4.Roll edge crimping:0.7~3.8mm<sup>2</sup>
- 5.Weight: 0.3Kg

Materials:


- 1.Main body:High-carbon steel
- 2.Mouth molds:Aluminum alloy
- 3.Handle material: PP+TPR

Product Number Code:


DS1162-100-X X

Crimping Type:  
2:Type 2

Plastic Color:  
G0:Grey & Orange





First crimping position



Second crimping position

When crimping, the conductor part needs to be crimped, and then the insulation part needs to be rolled and crimped twice. Please ensure that the handle is not excessively compressed, which may damage the insulation of the wire

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Multi functional spring terminal crimping pliers I		
X.	±0.60	X.	±5°	UNITS	mm				
.X	±0.38	.X	±3°	SHEET SIZE	A4				SERIES
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER		<div>晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD</div>					
SCALE		1:1	SHEET						1 OF 1
DRAWING NO.		C-DS1162-100-XX-A							



晨翔电子有限公司  
CONNFLY CONNFLY ELECTRONIC CO. LTD